Anwendung/Application :

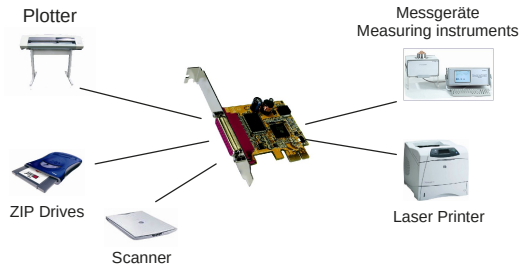



Operating System (OS): | Geprüft/Approved: | Verpackung/Packing:

98 SE · Me · NT 4.0 · 2000 · xp · Server 2003 · Windows Vista · Linux

CE FC RoHS DE97424562 WHQL Certified Microsoft Windows

1P Parallel EPP/ECP PCI-Express Karte

Beschreibung :	• Die PCI Express Parallel Karte stellt einen Parallel EPP/ECP High Performance Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Parallele Ausgang für PC's, kleine Workstations oder Server über den PCI Express Bus zu erweitern.
Merkmale :	• Schnittstelle: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port) • I/O Adressen: wird vom Betriebs System vergeben • Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing • PCI Express Schnittstelle kompatibel zu 1.0a Spezifikation • Windows WHQL Zertifiziert
Chip-Set :	• Oxford OX12PCI840
Datentransfer-Rate :	• 2Mbyte/Sek.
Anschlüsse :	• 1 x 25 Pin D-SUB Parallel Buchse
Hardwaresysteme :	• PCI Express Slot x1 bis x16
Betriebstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C (32 bis 131^{0}F) • 5 bis 95%
Abmessung / Gewicht :	• 70 x 66 mm / 150g
Lieferumfang :	• EX-44011 • Treiber CD • Handbuch

1P Parallel EPP/ECP PCI-Express card

Description :	• The PCI Express parallel adapter provides one EPP/ECP high performance ports. It is designed for PC´s, thin clients or server to provide instant LPT port expansion via the PCI Express Bus (PCIE). • The card is fully PCI Express Plug-and-Play compatible and no IRQ and I/O address conflict problems.
Feature :	• Interface: SPP (Standard Parallel Port), EPP (Enhanced Parallel Port), ECP (Enhanced Capacity Port) • I/O addresses: Setting from the operating system • Interrupt: Setting from the System BIOS with Interrupt Sharing • PCI Express Interface: Fully compliant with PCI-Express Base Specification Revision 1.0a • Windows WHQL certification
Chip-Set :	• Oxford OX12PCI840
Data transfer rate :	• 2Mbyte/Sec.
Connectors :	• 1 x 25 pin D-SUB parallel female connector
Hardware system :	• 1 x PCI Express Slot x1 to x16
Operating Temperature : Humidity :	• 0 to 55^{0}C (32 to 131^{0}F) • 5 to 95%
Size / Weight :	• 70 x 66 mm / 150g
Packaging contents :	• EX-44011 • Driver CD • Manual